



## E-series; elevator bottom

### Antti E60 elevator

Transfer capacity 60 t/h

Gear motor

- 11,2 m - 19,7 m 5,5 kW
- 20,2 m - 24,7 m 7,5 kW

- Back rotate stop (optional extra)

Buckets

- 2,22 bucket groups / m
- 1 with bottom + 2 bottomless

### Antti E80 elevator

Transfer capacity 80 t/h

Gear motor

- 11,2 m - 14,7 m 5,5 kW
- 15,2 m - 19,7 m 7,5 kW
- 20,2 m - 24,7 m 9,2 kW

- Back rotate stop (optional extra)

Buckets

- 2,22 bucket groups / m
- 1 with bottom + 3 bottomless

### Antti E100 elevator

Transfer capacity 100 t/h

Gear moto

- 11,2 m - 11,7 m 5,5 kW
- 12,2 m - 16,7 m 7,5 kW
- 17,2 m - 19,7 m 9,2 kW
- 20,2 m - 23,7 m 11,0 kW
- 24,2 m - 24,7 m 15,0 kW

- Back rotate stop (optional extra)

Buckets

- 1,9 bucket groups / m
- 1 with bottom + 5 bottomless

### Antti E120 elevator

Transfer capacity 120 t/h

Gear motor


- 11,2 m - 13,7 m 7,5 kW
- 14,2 m - 16,7 m 9,2 kW
- 17,2 m - 19,7 m 11,0 kW
- 20,2 m - 24,7 m 15,0 kW

- Back rotate stop (optional extra)

Buckets

- 1,9 bucket groups / m
- 1 with bottom + 6 bottomless

#### Symmetrical model

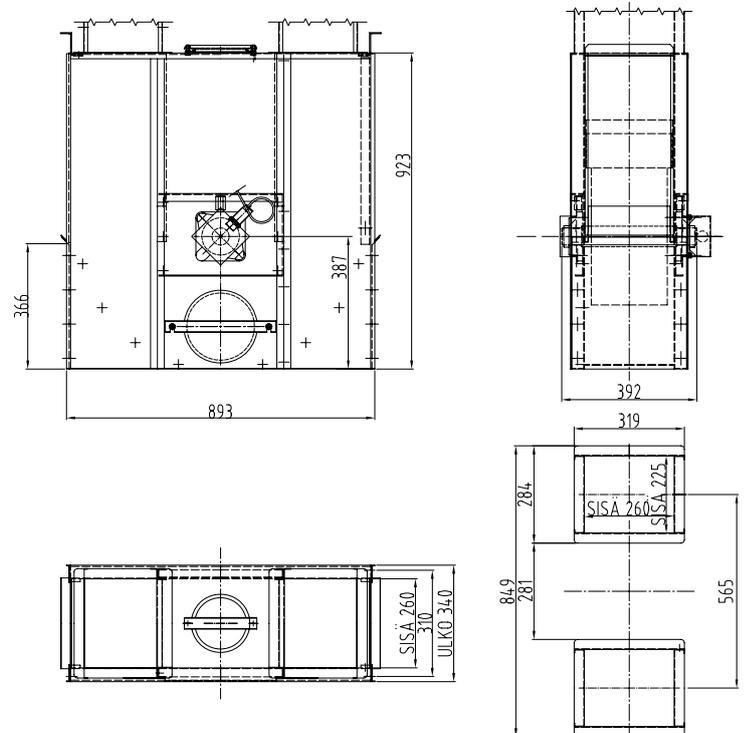

#### Hopper model

