




E-serie elevators; top end

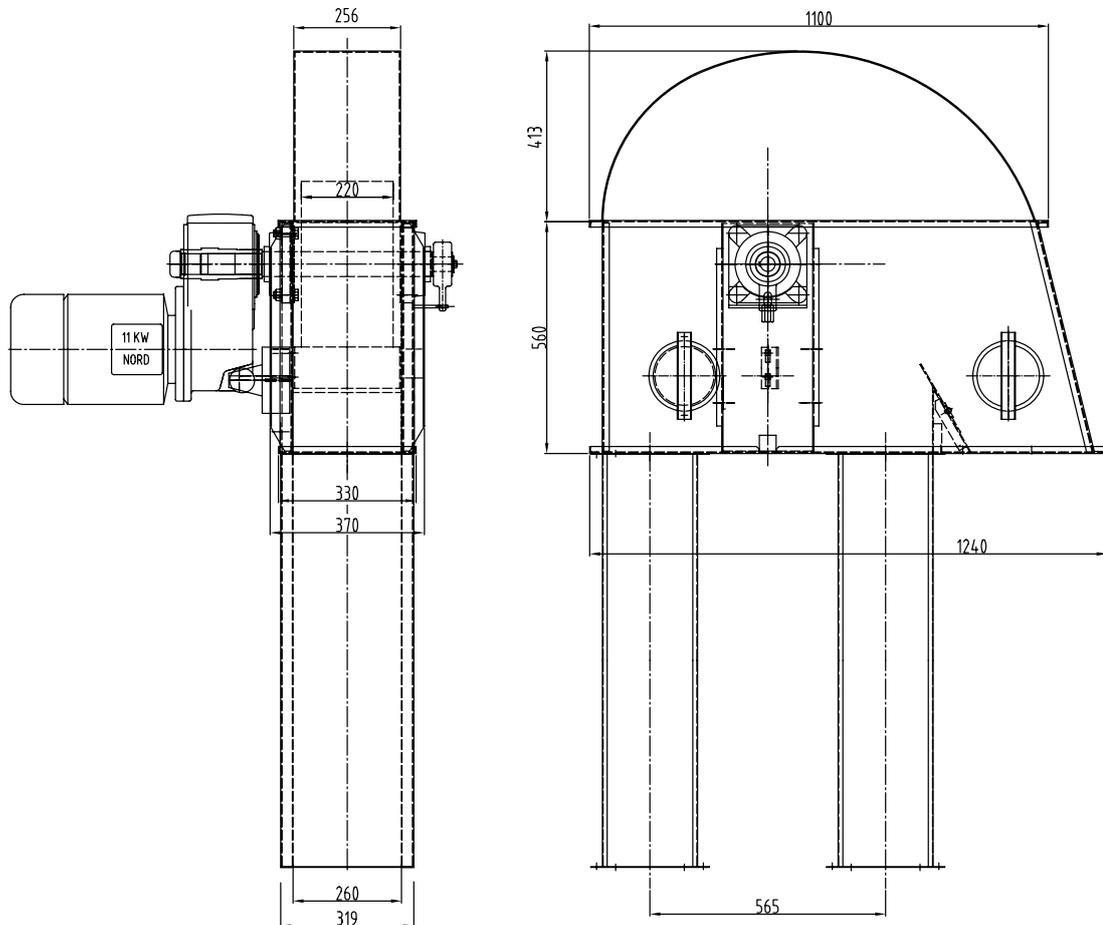

Construction

- Material hot galvanized steel plate
- Wearing parts can be changed
- Cleaning hatches in top / bottom part
- Smooth closed bucket belt pulleys
- Adjustable cleaners for bucket belt pulleys
- Bucket belt can be tighten by shortening with tools

Bucket belt

- Rubber belt with bylon strengthening
- Width 200 mm
- Speed ca. 2,8 m/s

Standard equipments

- Tip part
- Closing gate on both sides
- Buckets with bottom / bottomless
- Shutter plate with rack adjuster (hopper model)
- Speed guard
- Gear-head motor
- Hatch pipe
- Belt joint
- Support to the dryer

Options

- Motorized shutter
- Motorized 3-way divider D250
- Side feed hopper
- Rear feeding spout D200 or D250
- Rear feeding spout 4xD250
- 2-, 3-, 6- or 8-way divider
- Back rotate stop
- Front intake spout for hopper model 3xD250
- Dust suction between pipes