



NEW X-SERIES DRYERS


*Advanced Antti technology now in
a new price range!*

You'll see the difference



THE X SERIES CHANGES YOUR PERCEPTION OF GRAIN DRYING

Antti's X-series dryers began a new era in grain drying. With the X-series, commissioning the dryer is quick and easy like a mobile dryer. The actual construction time on the farm is short, as the X-series dryer is delivered as ready-made dryer modules as possible. The modules are manufactured at Antti's own factory under quality-controlled conditions.

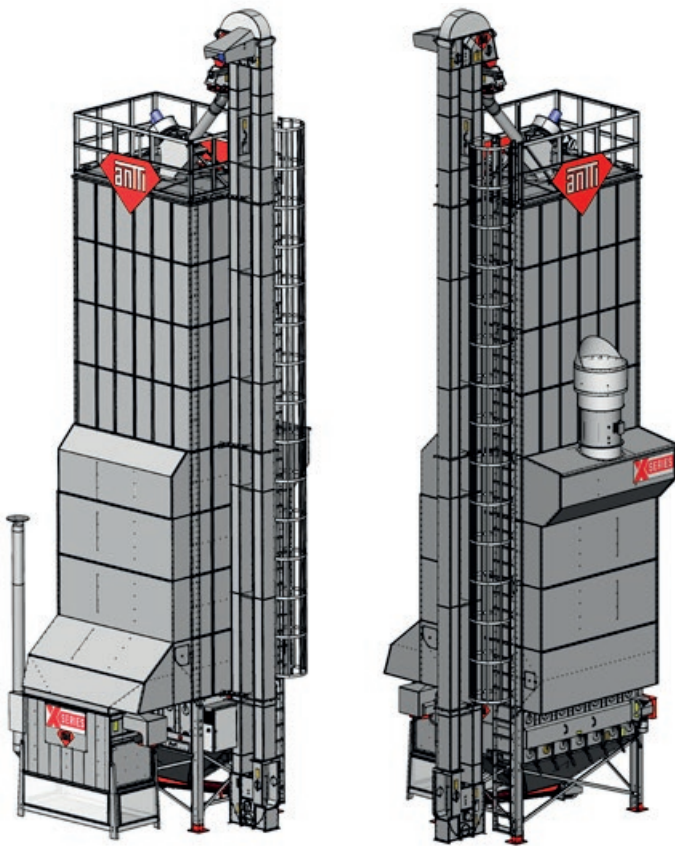

High-efficiency vacuum technology now available at entry-level prices

All X-series dryers are implemented with Antti's modern drying technology. The heat source is an efficient and safe oil heater with Oilon's HVO oil burner. The X-series dryers dry feed grain, seed grain and small seeds quickly and energy-efficiently. The drying process speed is increased by vacuum technology. An efficient pre-cleaner, vacuum technology, and the optional Dustex accessory also reduce the amount of dust.

Thought-out, reliable solutions

The X-series products reflect Antti's long experience in grain drying and its strong commitment to quality. For example, dryer automation is designed to be as easy to use as possible. The frequency converter-controlled axial fan saves energy and allows stepless air volume adjustment to suit all situations. Components and structures, such as the feeder, motor and bearings, are robust. The integrated heater and vertical installation of the axial fan saves space, reduces noise and enhances drying. Dust from drying air can be separated with a Dustex system. Compact and smart!



Read more and watch the video:

antti.fi/en/products/dryers/x-series/



X-SERIES

- X** Batch dryer crops are moving continuously = good uniformization of crops humidity
- X** Very efficient with small oil consumption
- X** Very low noise

X SERIES

EASY AND AFFORDABLE GRAIN DRYING



MODEL	X255	X320	X365	X430	X476	X255 Maize	X320 Maize
Volume	25,5 m ³	32,0 m ³	36,5 m ³	43,0 m ³	47,6 m ³	25,5 m ³	32,0 m ³
Elevator E60t/h	10,7 m	11,7 m	12,7 m	13,7 m	15,05 m	10,7 m	11,7 m
Heater model	400 kW	500 kW	650 kW	650 kW	650 kW	650 kW	650 kW
Fan with frequency converter	8,66 kW	8,66 kW	12,5 kW	17,2 kW	17,2 kW	17,2 kW	17,2 kW
Pre-cleaner (kW)	2,2 kW	2,2 kW	2,2 kW	2,2 kW	2,2 kW	2,2 kW	2,2 kW
Intake	Gravity or conveyor pit	Gravity or conveyor pit	Gravity or conveyor pit	Gravity or conveyor pit	Gravity or conveyor pit	Gravity or conveyor pit	Gravity or conveyor pit
Maximum power*	35A	35A	41A	49A	49A	49A	49A

* Power during drying. The possible filling conveyor current has not been taken into account. Voltage 400 V.

Accessories include:

- Dustex
- Cyclone
- Scale
- Isolation and cladding
- Partial batch drying
- Motorized divider
- Motorized elevator shutter



Antti-Teollisuus Oy

Koskentie 89
FI-25340 Kanunki (Salo)
Finland
VAT id: FI02073545

Tel. +358 2 7744 700
Sales +358 2 7744 750

